

EASY MAINTENANCE SKIRT SYSTEM

- Adjustable primary and secondary seal


- Easy access for inspection

- Maintenance completed by single


The H & B 'Easy Maintenance Skirting System' has been designed with simple, safe and speedy maintenance in mind. Access to the skirt liner (primary seal) is achieved by one man rotating a skirt handle and clamp, enabling removal of skirt rubber. Once the skirt rubber (secondary seal) has been removed, visual inspection of the skirt liners for wear is possible. If there has been excessive wear on the liner's edge, the skirt liners can be lowered to close the gap. This is done by loosening the liner fixing bolts and rotating the liner adjuster screw.

Vertical skirt liner:

a. with clamp bar

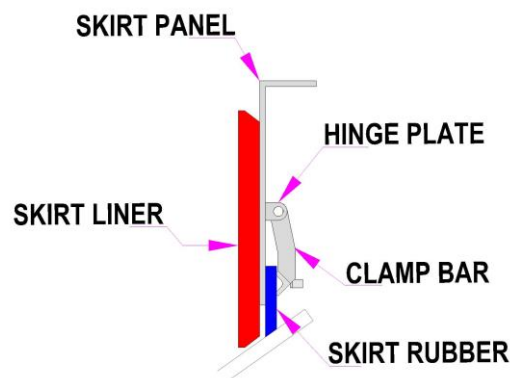


b. with clamp handle

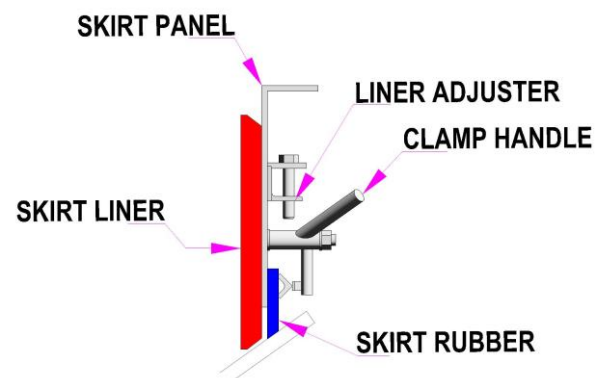


Angled skirt liner:

a. with clamp bar

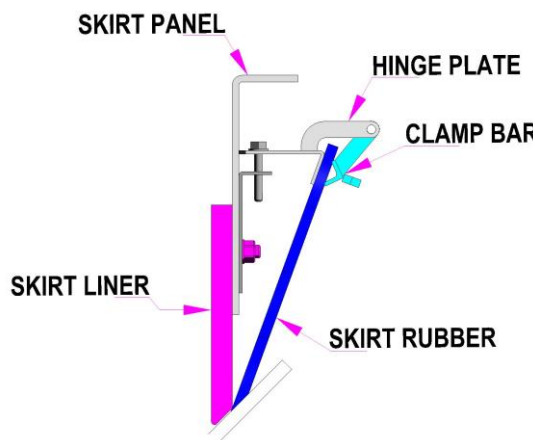

b. with clamp handle

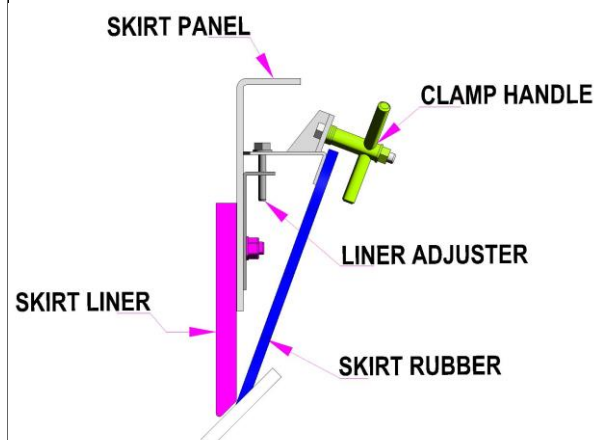

The H & B 'Easy Maintenance' conveyor skirting system allows for simple, quick and safe maintenance of skirt liners, resulting in minimal spillage and material build up around conveyor transfer areas.



7 Tahiti Lane
Hillarys, WA 6025
(08) 9403 2993
www.handbmining.com